

# VITAWORK®

## Fact Sheet

### TECHNICAL DATA

VITAWORK® 7	
Colours	140 Metallic Silver/Black (similar RAL 9006 / 7021)
Dimensions	Height: 2,040 mm
	Luminaire head (W x D x H): 542 x 370 x 32,5 mm
	Ceiling height clearance: > 2 m
Weight	19 kg
Lamp base	C-shaped
Material	Aluminium, Steel (lamp base), Plastic (touch panel & side caps)
Energy efficiency	This product contains (a) light source(es) with the energy efficiency class(es)
	Light source direct no. 34601, energy efficiency class D (Reg. 908500)
	Light source indirect no. 34600, energy efficiency class D (Reg. 908623)
Protection type	IP 20
Protection class	I ⚡



Illuminants	
Fitted with	LED
Power consumption	50 W
Light distribution	symmetric
Nominal luminous flux direct	2,000 lm
Luminous flux indirect	5,000 lm
Nominal luminous flux indirect	7,000 lm
Luminous efficiency	>130 lm/W
Colour temperature (CCT)	4.000 K
Colour tolerance	< 3 SDCM
50,000 h	L85B10
UGR	< 16
Colour reproduction index	> 80
Plug	Schuko-plug (Type F) / Kettle plug + EU/CH/UK - plug
Cable length	3 m
Standby consumption	≤ 0,5 W

VITACORE®	
Operation	via VITACORE® electronics and sensors
Light intensity setting	Seamless or in five steps direct & indirect dimming via the touch panel
Sensors	Infrared Presence Sensor & Luminosity Sensor

Article overview			
Article number	Luminaire	Plug	Control
9247-140	VITAWORK® 7 Sym. PIR	Schuko-plug	Dimmable plus sensors
9267-140	VITAWORK® 7 Sym. PIR KP	Kettle plug	Dimmable plus sensors
9248-140	VITAWORK® 7 Sym. DIM	Schuko-plug	Dimmable
9268-140	VITAWORK® 7 Sym. DIM KP	Kettle plug	Dimmable




# TECHNICAL VIEW

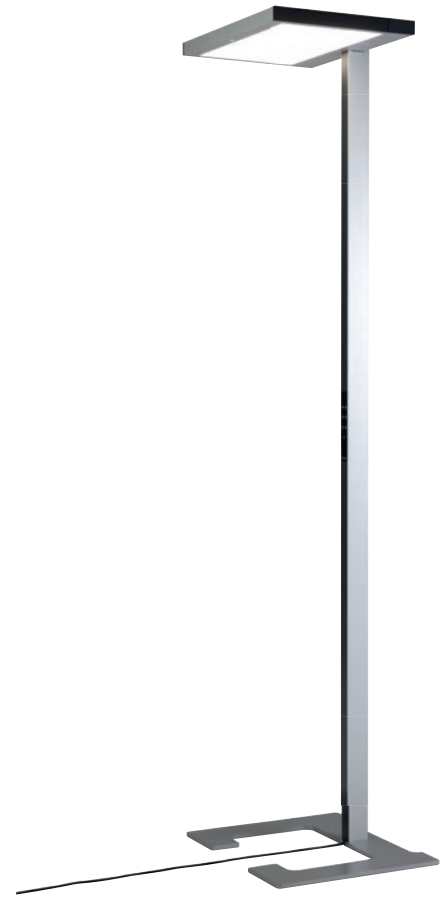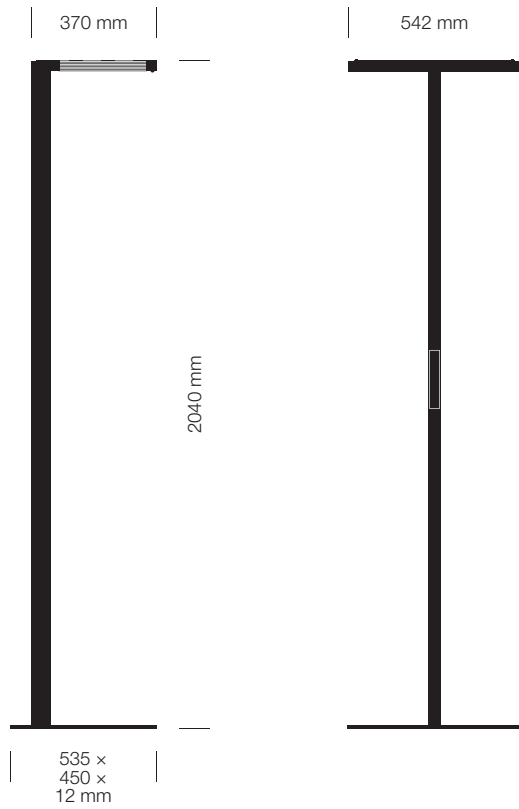


# LIGHT DISTRIBUTION CURVE

VITAWORK®

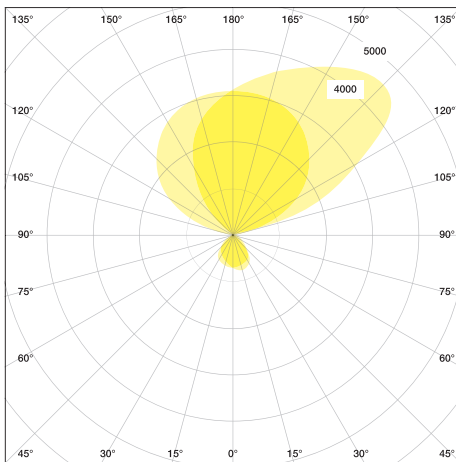

VITAWORK®

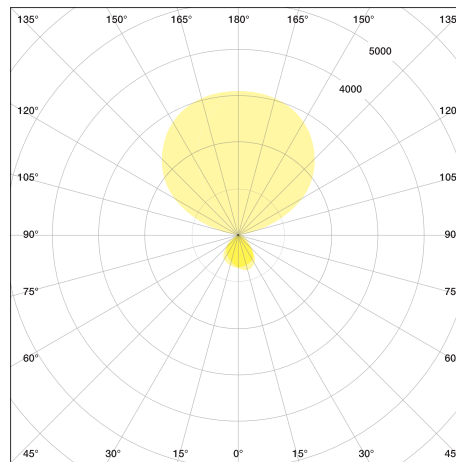

Free download at [www.luctra.eu](http://www.luctra.eu)

**||| LUCTRA**

LUCTRA® is a brand of  
DURABLE · Hunke & Jochheim GmbH & Co. KG  
Westfalenstraße 77-79 · 58636 Iserlohn  
Postfach 1753 · 58634 Iserlohn  
Tel.: +49 23 71 6624 45  
[info@luctra.eu](mailto:info@luctra.eu) · [www.luctra.eu](http://www.luctra.eu)